

Datasheet

Manufacturer Part No.: T24C045 ... T24C046

Heat Shrink Butt Crimp Connector 100 pcs including Crimping-Pliers




This Set is especially suitable for hobbyists, craftsmen, field service, service workshops, electronics technicians and laboratory needs. The hot-melt inner adhesive provides a waterproof seal when properly overlapped. Optimal for repairing or connecting cables and conductors (lawn mower tracer cables, signal cables, etc.), service, manufacturing or hobby.

Application is very simple: strip cable and insert on both sides until stripped cable ends overlap. Crimp with crimping pliers and then activate the heat shrink tubing in the respective temperature range - ideally with a heat gun. Waterproof, REACH and RoHS compliant.

Technical data: Shrink ratio: 3:1 • IP class: IP67 • Temp. range: -55 ... 125 °C • Shrink temp.: 80 ... 130 °C • Voltage resistance: 600 V.

Part-No.	Description	Diameter	Length	Max. Current	EAN/GTIN
T24C045	Heat shrink butt crimp connector Red 0,5-1,5 qmm 100 pcs with Crimping-Pliers	4,7 mm	36 mm	19 A	4260732289470
T24C046	Heat shrink butt crimp connector Blue 1,5-2,5 qmm 100 pcs with Crimping-Pliers	5,7 mm	37 mm	27 A	4260732289487

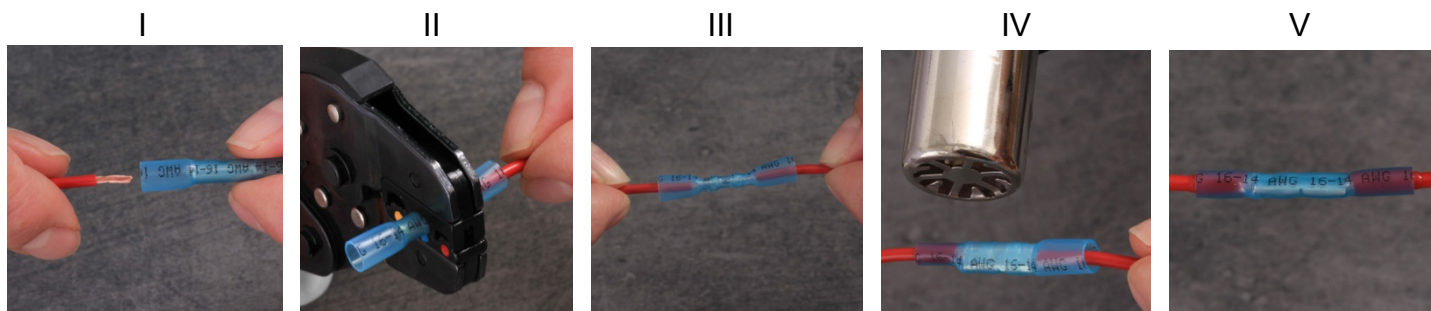

Crimp on both sides!

Connection only by qualified electricians. We assume no liability or warranty in case of incorrect application.

This is a publication by Conrad Electronic SE, Klaus-Conrad-Str. 1, D-92240 Hirschau (www.conrad.com).

All rights including translation reserved. Reproduction by any method, e.g. photocopy, microfilming, or the capture in electronic data processing systems require the prior written approval of the editor. Reprinting, also in part, is prohibited. The publication represents the technical status at the time of printing. All statements without guarantee.

© Conrad Electronic SE